


eVIEW

Analog Addressable Serial Annunciator: VF1172-4M-FB



USCG Type Approved
161.002/A53/0

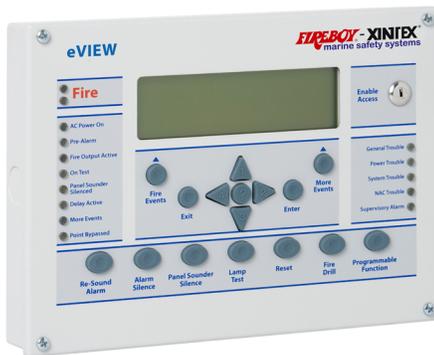

Standard Features


- Available in Gray
- Up to 15 annunciators can be connected to each Elite RSM fire control panel
- Large liquid crystal display (240 x 64 pixels)
- High brightness LED indications
- Internal sounder
- Replicates all panel controls (Elite RSM)
- Simple, two-wire serial connection
- Small, Elite RSM style enclosure
- Removable electronics for easy installation
- 24V DC powered
- Low power consumption
- Multi language options
- Connection supervised by Elite RSM fire control panel
- Recess mounting using optional VF1173-40

Product Overview


- Designed and manufactured to the highest standards in a quality controlled environment, the eVIEW fire alarm annunciator provides a simple and convenient method of extending the controls and indications of the Elite fire alarm control panel to other locations.
- The large, graphic liquid crystal display and high brightness LED indicators duplicate the indications on the Elite fire alarm control panel at up to 15 additional locations via a simple, two-wire serial data connection.
- The eVIEW is powered by 24V DC (which can be via an additional 2 conductors from the control panel or local 24V DC listed supply).
- eVIEW is housed in a small enclosure which is styled similarly to the Elite RSM control panel and is ideal for installations where a large control panel would be detrimental to décor such as entrance halls.
- Up to 15 eVIEW annunciators can be connected to each control panel on the Elite network making eVIEW ideal where multiple points of indication and/or control are required, such as nurses stations or shop units.

FIREBOY - XINTEX


eLAN or Elite series control panel

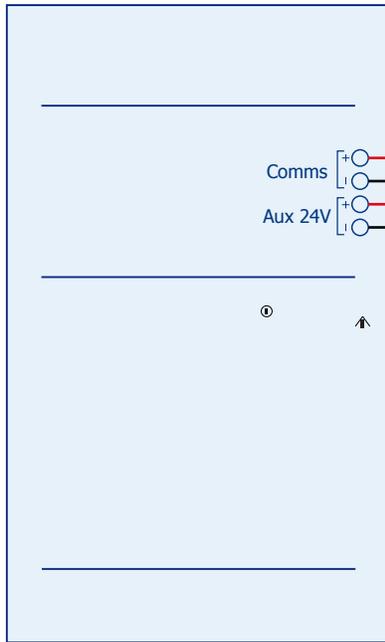

eView #1

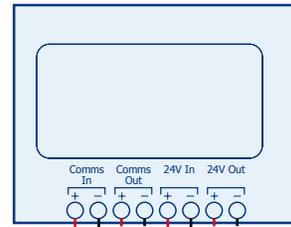

eView #15

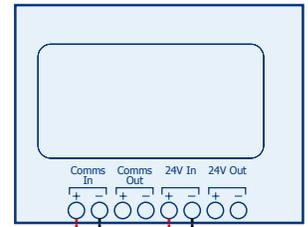

Technical Specifications

Construction: 18AWG sheet steel

Cable entry: 4 knockouts in back of box and 1 in left and right sides

Dimensions: 10.4"W x 7.5"H x 1.6"D

Weight: 3.5 lbs.

Finish: BS 00 A 05 (Gray)

24V supply: 21 to 30V DC

Maximum ripple current: 200 millivolts

Quiescent current of panel in mains fail: 0.03 Amps

Serial data connection: 2 core RS485 (Up to 1200 metres total cable length)

Maximum terminal capacity: 12AWG


Technical Specifications

Part Number: VF1172-4M-FB

Outer Dimensions: 11.3" W x 8.6" H x 1.3" D

Inner Dimensions: 10.3" W x 7.4"

Color: Available in Gray

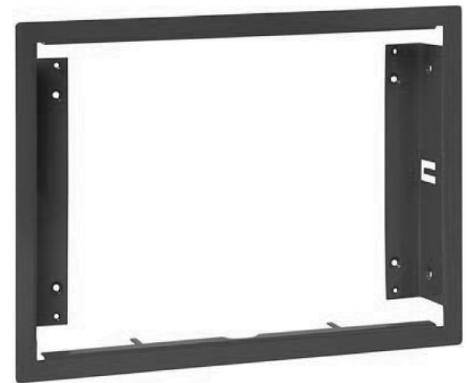

The Fireboy-Xintex trim ring allows the eVIEW annunciator to easily be recess mounted. Fireboy-Xintex trim rings provide placement tabs that fold behind dry wall. Traditional screw mounting is available by 2 openings in each of the vertical frames. Conduit entry is not blocked by trim ring.